


SPECIFIER CHART TRITON DROP INLET FILTERS	INLET (ID) INSIDE DIMENSION Of Catch Basin	MEDIA REM - BFTG* FILTERED Flow Rate	MEDIA REM - FOG** FILTERED Flow Rate	MEDIA REM - FOG & BFTG*** FILTERED Flow Rate	MEDIA REM - 4.8MM PERF FILTERED Flow Rate	TOTAL FILTER BYPASS Flow Rate	DEBRIS HOLDING CAPACITY
MODEL:	<i>(inch x inch)</i>	CFS	CFS	CFS	CFS	CFS	CUBIC FEET
			Standard				
TR12RD Configured with:	12" Dia. RD						
Cartridge: TR7-CART (4")		0.42	0.17	0.17	1.1	1.61	0.19
Cartridge: TR7-CART (8")		0.91	0.25	0.25	2.21	1.61	0.42
TR1212 Configured with:	12" X 12"						
Cartridge: TR7-CART (4)		0.42	0.17	0.17	1.1	1.61	0.19
Cartridge: TR7-CART (8)		0.91	0.25	0.25	2.21	1.61	0.45
TR16RD Configured with:	16" Dia. RD						
Cartridge: TR7-CART (4)		0.42	0.17	0.17	1.1	1.61	0.19
Cartridge: TR7-CART (8)		0.91	0.25	0.25	2.21	1.61	0.45
TR1616 Configured with:	16" X 16"						
Cartridge: TR7-CART (4)		0.42	0.17	0.17	1.1	1.61	0.19
Cartridge: TR7-CART (8)		0.91	0.25	0.25	2.21	1.61	0.69
TR18RD Configured with:	18" Dia. RD						
Cartridge: TR7-CART (4)		0.42	0.17	0.17	1.1	1.61	0.19
Cartridge: TR7-CART (8)		0.91	0.25	0.25	2.21	1.61	0.69
TR1818 Configured with:	18" X 18"						
Cartridge: TR10-CART (4)		0.77	0.19	0.19	1.58	5.14	1.04
Cartridge: TR10-CART (8)		1.63	0.38	0.38	3.11	5.14	2.32
Cartridge: TR10-CART (16)		3.07	0.79	0.79	6.28	5.14	5.03
TR1824 Configured with:	18" X 24"						
Cartridge: TR10-CART (8)		1.63	0.38	0.38	3.11	5.14	1.04
Cartridge: TR10-CART (16)		3.07	0.79	0.79	6.28	5.14	2.69
TR2024 Configured with:	20" X 24"						
Cartridge: TR10-CART (8)		1.63	0.38	0.38	3.11	5.14	1.04
Cartridge: TR10-CART (16)		3.07	0.79	0.79	6.28	5.14	2.69
TR2424 Configured with:	24" X 24"						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	2.26
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	3.4
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	4.53

TRITON – TR DROP INLET FILTER SERIES
By REM Inc. (888.526.4736)
REMFILTERS.COM

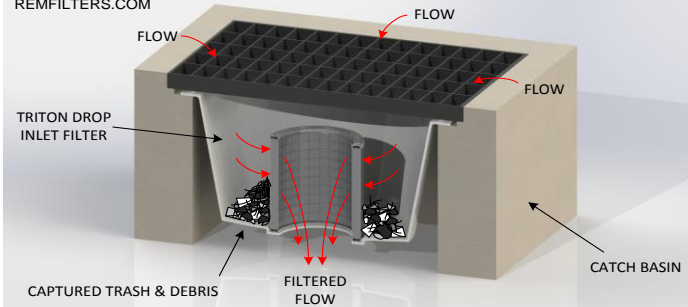


Revel Environmental Manufacturing Inc.
sales@remfilters.com (888) 526-4736 Lic. No. 857410

Northern California
960-B Detroit Avenue
Concord, California 94518
P: (925) 676-4736
F: (925) 676-8676

Southern California
2110 South Grand Avenue
Santa Ana, California 92705
P: (714) 557-2676
F: (714) 557-2679

SPECIFIER CHART TRITON DROP INLET FILTERS	INLET (ID) INSIDE DIMENSION Of Catch Basin	MEDIA REM - BFTG* FILTERED Flow Rate	MEDIA REM - FOG** FILTERED Flow Rate	MEDIA REM - FOG & BFTG*** FILTERED Flow Rate	MEDIA REM - 4.8MM PERF FILTERED Flow Rate	TOTAL FILTER BYPASS Flow Rate	DEBRIS HOLDING CAPACITY
MODEL:	(inch x inch)	CFS	CFS	CFS	CFS	CFS	CUBIC FEET
			Standard				
TR24RD Configured with:	24" Dia. RD						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	2.26
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	3.4
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	4.53
TR2436 Configured with:	24" X 36"						
Cartridge: TR10-CART (8) (Qty 2)		3.26	0.76	0.76	6.28	10.28	1.57
TR2436-14(8) Configured with:	24" X 36"						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	2.5
TR30RD Configured with:	30" Dia. RD						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	2.87
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	4.31
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	5.74
TR3030 Configured with:	30" X 30"						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	3.76
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	5.64
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	7.52
TR2448 Configured with:	24" X 48"						
Cartridge: TR14-CART (8) (Qty 2)		5.22	1.38	1.38	4.42	26.3	4.53
Cartridge: TR14-CART (12) (Qty 2)		6.02	2.12	2.12	6.64	26.3	6.8
Cartridge: TR14-CART (16) (Qty 2)		9.82	2.86	2.86	8.85	26.3	9.06
TR3636 Configured with:	36" X 36"						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	5.6
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	8.4
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	11.2
TR36RD Configured with:	36" Dia. RD						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	4.71
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	7.07
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	9.43

TRITON – TR DROP INLET FILTER SERIES
By REM Inc. (888.526.4736)
REMFILTERS.COM

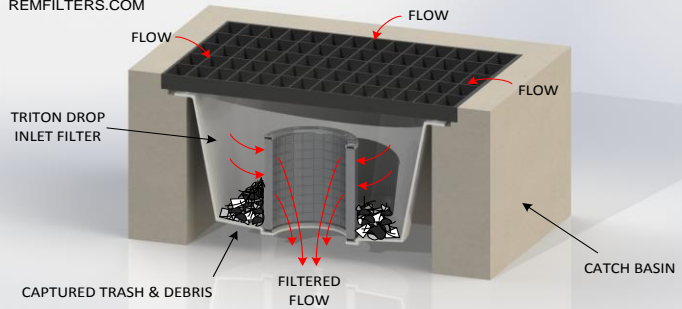

Revel Environmental Manufacturing Inc.
sales@remfilters.com (888) 526-4736 Lic. No. 857410

Northern California
960-B Detroit Avenue
Concord, California 94518
P: (925) 676-4736
F: (925) 676-8676

Southern California
2110 South Grand Avenue
Santa Ana, California 92705
P: (714) 557-2676
F: (714) 557-2679

SPECIFIER CHART TRITON DROP INLET FILTERS	INLET (ID) INSIDE DIMENSION Of Catch Basin	MEDIA REM - BFTG* FILTERED Flow Rate	MEDIA REM - FOG** FILTERED Flow Rate	MEDIA REM - FOG & BFTG*** FILTERED Flow Rate	MEDIA REM - 4.8MM PERF FILTERED Flow Rate	TOTAL FILTER BYPASS Flow Rate	DEBRIS HOLDING CAPACITY
MODEL:	(inch x inch)	CFS	CFS	CFS	CFS	CFS	CUBIC FEET
			Standard				
TR42RD Configured with:	42" Dia. RD						
Cartridge: TR14-CART (8)		2.61	0.69	0.69	4.42	13.15	6
Cartridge: TR14-CART (12)		3.76	1.05	1.05	6.64	13.15	9
Cartridge: TR14-CART (16)		4.91	1.43	1.43	8.85	13.15	12
TR4848 Configured with:	48" X 48"						
Cartridge: TR24-CART (8)		4.85	1.22	1.22	7.92	51.29	7.24
Cartridge: TR24-CART (16)		10.3	2.42	2.42	15.81	51.29	15.5
TR48RD Configured with:	48" Dia. RD						
Cartridge: TR24-CART (8)		4.85	1.22	1.22	7.92	51.29	3.37
Cartridge: TR24-CART (16)		10.3	2.42	2.42	15.81	51.29	6.74

Notes:

** Standard cartridge configurations for the TRITON Drop Inlet Series filter. Please specify if larger capacity cartridges are required. The cartridge heights are listed in () next to the model. For shallow catch basins choose the smaller cartridge heights.

** Please see MEDIA OPTIONS page for specific media types and configurations.

** Filter debris capacities can be modified to utilize the maximum dimensions of each specific catch basin. Volumes will either increase or decrease depending upon the size of the catch basin and cartridge used. Volume capacities that are shown, are based on the catch basin filters standard inside wall dimensions for that filter size. Debris holding capacities can be modified to utilize the additional depth of each specific catch basin by adding taller cartridges.

REM Technical Support is available to assist with TRITON Series filter configurations, media strategies, and customization of models.



Revel Environmental Manufacturing Inc.

sales@remfilters.com (888) 526-4736 Lic. No. 857410

Northern California
960-B Detroit Avenue
Concord, California 94518
P: (925) 676-4736
F: (925) 676-8676

Southern California
2110 South Grand Avenue
Santa Ana, California 92705
P: (714) 557-2676
F: (714) 557-2679

