
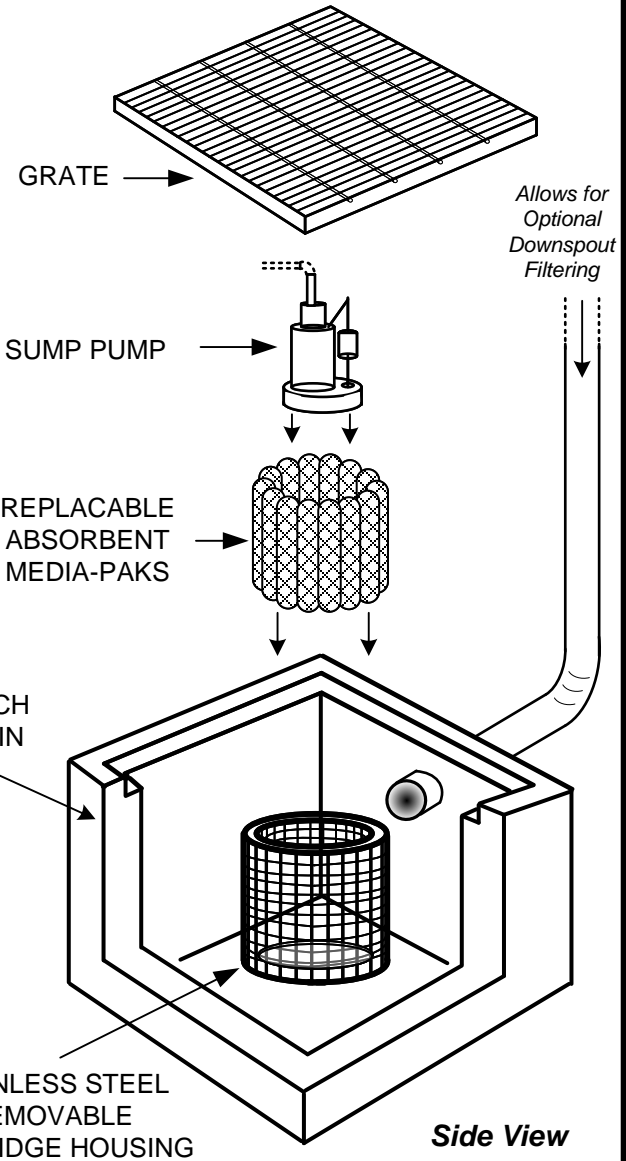



REM TRITON – CSPF (Cartridge Sump Pump Filter)

REM designed the TRITON - CSPF (Cartridge Sump Pump Filter) Series to provide a highly adaptable solution that allows the flexibility to maximize the filter treatment flow rates and pollutant capturing capacity. TRITON - CSPF filters are utilized in structures that require a sump pump for removing captured fluids. They help protect sump pumps from trash/debris that may cause the sump pump to fail. They also can capture hydrocarbons and other pollutants before fluid is pumped out of the structure. Media strategy may be optimized for specific pollutant concerns.

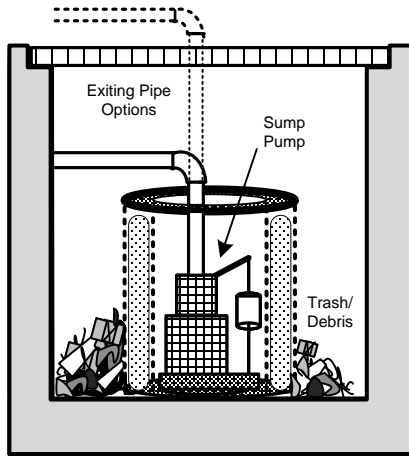

Notes:

- The TRITON – CSPF Series Filters can be designed for many different sized sump pumps on the market today.
- Base plates when used, are constructed using High Density Polyethylene Plastic (HDPE).
- Filter cartridge housings are constructed utilizing Type 304 Stainless Steel, with 2" welded square openings.
- Removable cartridge tops are constructed utilizing over 100% recycled ABS Plastic.
- REM TRITON replacement Filter Media Packs are charged with REM FOG media an expanded volcanic ash medium treated to be highly hydrophobic housed in a durable geo-textile perforated polypropylene woven fabric. REM FOG media effectively encapsulates liquefied petroleum hydrocarbons (Fats, Oils & Grease including animal fats). The media's hydrophobic characteristic allows for greater polishing of flow resulting in the reduction of Total Suspended Solids (TSS). Suspended solid reduction includes but is not limited to debris, trash, silt sediment and agglomerated heavy metals. (Additional media options are available including mixed blends of granulated carbon [AC] and Zeolite [ZEO].)
- REM TRITON filter cartridges are removable for ease of cleaning and maintenance.
- Filter designs include a high flow overflow bypass to eliminate pooling or flooding during heavy rain events.
- See our Specifier Sheet for sizes, models and flow rate information.
- Maintenance information and replacement REM Media Packs are available upon request by contacting REM at sales@remfilters.com or (888) 526-4736.
- Made in the USA.

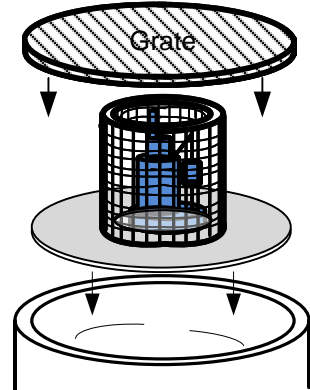

Taller cartridge options provide greater volume capacity and increased treatment rates.

**MADE IN
USA**

THE DESIGN AND DETAIL OF THIS DRAWING IS THE PROPERTY OF REM INC. AND IS NOT TO BE USED EXCEPT IN CONNECTION WITH OUR WORK, DESIGN AND INVENTION RIGHTS ARE RESERVED.

U.S. Patent Pending

PH: (888) 526-4736

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REM Inc.

**TRITON Series
CARTRIDGE SUMP PUMP FILTER**
(A pre-filter for sump pumps)

DRAWN BY:

C.F.

FOR:

Sump Pump Applications

REV

SCALE

1/4 : 1

DATE: 3/3/2013

SHEET


1 OF 1

REM's TRITON – CSPF (Cartridge Sump Pump Filters) Series 1

REM designed the TRITON - CSPF (Cartridge Sump Pump Filter) Series to provide a highly adaptable solution that allows the flexibility to maximize the filter treatment flow rates and pollutant capturing capacity. TRITON - CSPF filters are utilized in structures that require a sump pump for removing captured fluids. They help protect sump pumps from trash/debris that may cause the sump pump to fail. They also can capture hydrocarbons and other pollutants before fluid is pumped out of the structure. Media strategy may be optimized for specific pollutant concerns.


MODEL NO.	Cartridge (I.D.)	Cartridge (O.D.)	Cartridge Height	Maximum Pump Width
TR-CSPF - 10	6" Dia.	10" Dia.	8"	6" Dia.
TR-CSPF - 14	10" Dia.	14" Dia.	8", 12"& 16"	10" Dia.
TR-CSPF - 24	20" Dia.	24" Dia.	16"	20" Dia.

Cartridge Sump Pump Filters have solid bottoms providing a complete seal between the pump and incoming flow. Custom Heights also available. REM also designs custom filters for unique storm water infrastructures and applications. (Sump Pumps to be supplied by others)

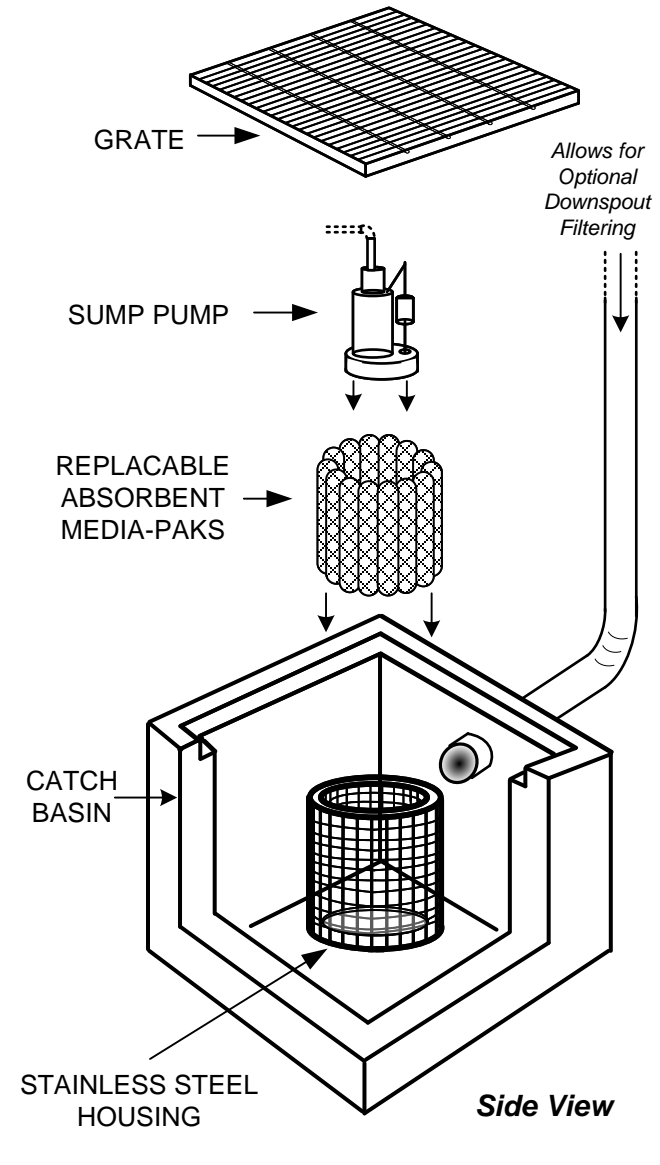

Notes:

- All dimensions are in inches, unless otherwise noted.
- The TRITON – CSPF Series Filters can be designed for many different sized sump pumps on the market today.
- Base plates when used, are constructed using High Density Polyethylene Plastic (HDPE).
- Filter cartridge housings are constructed utilizing Type 304 Stainless Steel, with 2" welded square openings.
- Removable cartridge tops are constructed utilizing over 80% recycled ABS Plastic.
- REM TRITON replacement Filter Media Packs are charged with REM FOG media an expanded volcanic ash medium treated to be highly hydrophobic housed in a durable geo-textile perforated polypropylene woven fabric. REM FOG media effectively encapsulates liquefied petroleum hydrocarbons (Fats, Oils & Grease including animal fats). The media's hydrophobic characteristic allows for greater polishing of flow resulting in the reduction of Total Suspended Solids (TSS). Suspended solid reduction includes but is not limited to debris, trash, silt sediment and agglomerated heavy metals. (Additional media options are available including mixed blends of granulated carbon [AC] and Zeolite [ZEO].)
- REM TRITON filter cartridges are removable for ease of cleaning and maintenance.
- Filter designs include a high flow overflow bypass to eliminate pooling or flooding during heavy rain events.
- See our Specifier Sheet for sizes, models and flow rate information.
- Maintenance information and replacement REM Media Packs are available upon request by contacting REM at sales@remfilters.com or (888) 526-4736.
- Made in the USA.

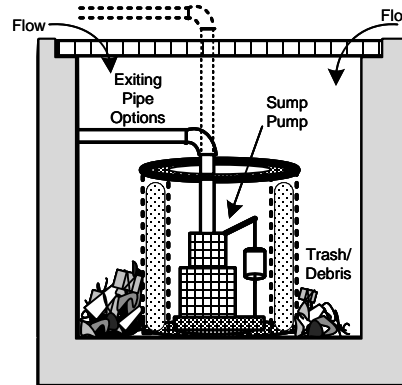

Taller cartridge options provide greater volume capacity and increased treatment rates.



THE DESIGN AND DETAIL OF THIS DRAWING IS THE PROPERTY OF REM INC. AND IS NOT TO BE USED EXCEPT IN CONNECTION WITH OUR WORK. DESIGN AND INVENTION RIGHTS ARE RESERVED.

U.S. Patent Pending

PH: (888) 526-4736

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REM Inc.

TRITON Series #1 CARTRIDGE SUMP PUMP FILTERS (A pre-filter for sump pumps)

SCA LE	1/4 : 1	DRAWN BY: C.F.	FOR: Sump Pump Combinations	REV
DATE: 3/3/2013		SHEET 1 OF 1		