


REM's TRITON 180 (Downspout) Series Filters

REM designed the TRITON -180 (Downspout) Filter Series to provide a highly adaptable solution that allows the flexibility of installing a filtering system for downspouts, close to a buildings outside walls. The TRITON 180 filters may be utilized in new construction or retrofitted in existing downspout structures. They are sized to spec or modified in the field for downspouts with unusual dimensions. Media strategy may be optimized for specific pollutant concerns.

FILTER HOUSING


(Type 304 Stainless Steel, having 2.0" Square openings)

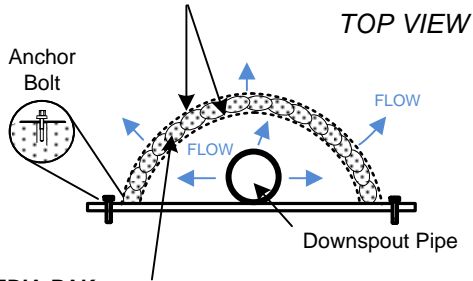

MEDIA-PAK

(Disposable Media-Pak's are constructed from durable geo-textile polypropylene fabric) Filter has been designed so that effluent must flow through media for filtering.

SIDE VIEW

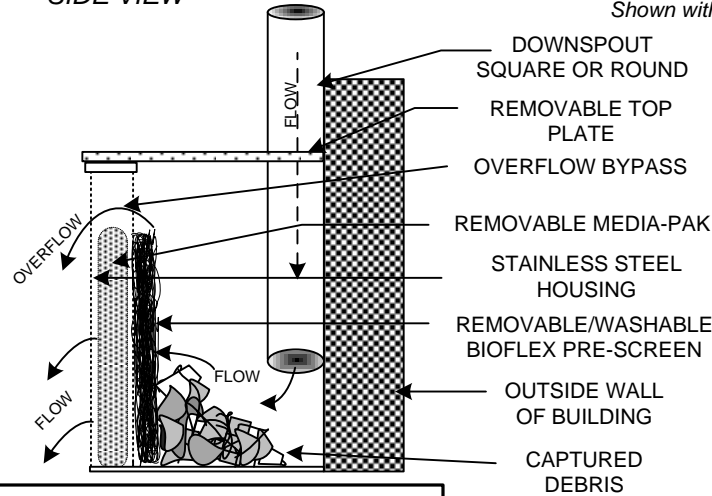


Shown with optional copper skin



MODEL: TR24-180 (8)

TRITON - 180 (Downspout) SERIES FILTER
By REM Inc. (888.526.4736)

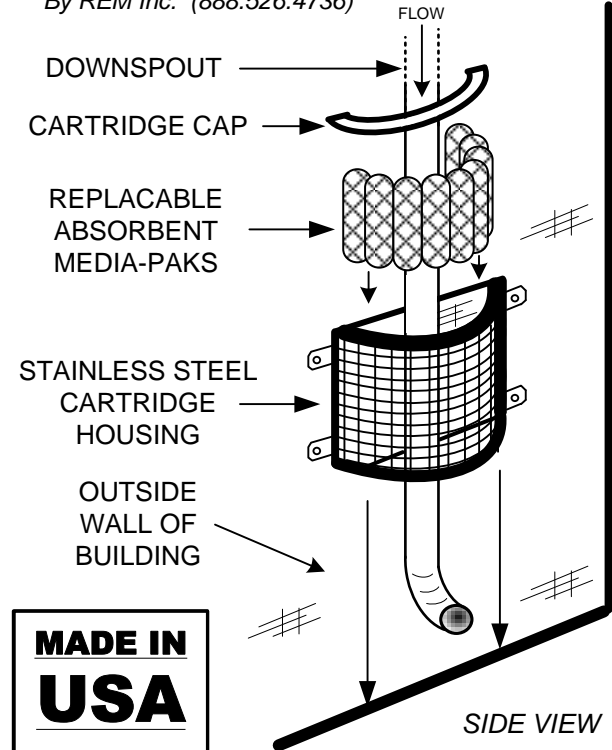

MADE IN USA

Notes:

- The TRITON - 180 Series Filters are available in sizes to fit most industry downspout standard downspout sized pipes both square and round. Custom sizes are also available to fit most applications.
- Filter cartridge housings are constructed utilizing Type 304 Stainless Steel, with 2" welded square openings.
- Removable cartridge tops are constructed utilizing over 40% recycled Non-reactive High Density Polystyrene Plastic with added U.V. inhibitors.
- Filter replacement media packs are configured with REM FOG media, charged to capture hydrocarbons (Fats, Oils & Grease) as well as Suspend Solids from storm runoff. (Additional media options are available including granulated carbon (AC) and Zeolite (ZEO) and mixed blends there of.)
- Filters configured with FOG media polishes flow to remove TSS's including but not limited to fine sediment, silt and debris. Heavy metals may be reduced and/or removed from flow through agglomeration.
- Due to the many different configurations that downspout may come in, not all can be shown here. Please call REM and we will be glad to help develop the correct application for your needs.
- Filter designs include a high flow overflow bypass to eliminate pooling or flooding during heavy rain events.
- For larger flows and debris capacities, please see our TRITON 360 Series.
- See our Specifier Sheet for sizes, models and flow rates.
- Maintenance information and replacement media packs are available upon request by contacting REM at sales@remfilters.com or (888) 526-4736.



MODEL: TR14-180 (8)

THE DESIGN AND DETAIL OF THIS DRAWING IS THE PROPERTY OF REM INC. AND IS NOT TO BE USED EXCEPT IN CONNECTION WITH OUR WORK, DESIGN AND INVENTION RIGHTS ARE RESERVED.

Patent Pending

PH: (888) 526-4736

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REM Inc.

TRITON 180 DOWNSPOUT FILTRATION SERIES

(Multiple Applications)

SIZE	DRAWN BY:	FOR:	REV
	C.F.	Downspout Filtering	
SCA Not to scale	DATE: 5/22/2016	SHE	1 OF 1